


P-Channel Enhancement Mode MOSFET

Features

- -20V/-3A
- $R_{DS(ON)}=44m\Omega$ (typ) @ $VGS=-4.5V$
- $R_{DS(ON)}=52m\Omega$ (typ) @ $VGS=-2.5V$
- $R_{DS(ON)}=65m\Omega$ (typ) @ $VGS=-1.8V$
- 100% UIS & RG Tested
- Reliable and Rugged
- Lead Free and Green Devices Available
(RoHS Compliant)

SOT23-3L
Top View Bottom View

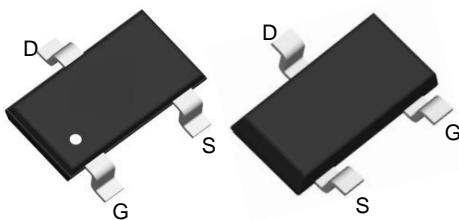


Applications

- Power Management for Industrial DC/DC Converters

Marking

Marking	AS****
---------	--------

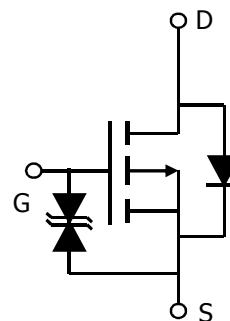

P Channel







Absolute Maximum Ratings ($T_A = 25^\circ C$ unless otherwise noted)

Symbol	Parameter	Rating	Unit
Common Ratings			
V_{DSS}	Drain-Source Voltage	-20	V
V_{GSS}	Gate-Source Voltage	± 12	
I_D	Continuous Drain Current	-3	A
I_{DM}	Pulsed Drain Current	-18	
I_S	Diode Continuous Forward Current	-2	A
T_{STG}, T_j	Storage Temperature Range	-55 to 150	°C
PD	Power Dissipation	$T_A=25^\circ C$	W
		$T_A=70^\circ C$	
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient	120	°C/W

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{DS}}=-250\mu\text{A}$	-20	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}}=-16\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-1	μA
		$T_J=55^\circ\text{C}$	-	-	-5	
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{DS}}=-250\mu\text{A}$	-0.4	-0.7	-1.2	V
I_{GSS}	Gate Leakage Current	$V_{\text{GS}}=\pm 10\text{V}, V_{\text{DS}}=0\text{V}$	-	-	± 10	μA
$R_{\text{DS}(\text{ON})}$	Drain-Source On-state Resistance	$V_{\text{GS}}=-4.5\text{V}, I_{\text{DS}}=-4\text{A}$	-	44	55	$\text{m}\Omega$
		$V_{\text{GS}}=-2.5\text{V}, I_{\text{DS}}=-4\text{A}$	-	52	65	
		$V_{\text{GS}}=-1.8\text{V}, I_{\text{DS}}=-2.5\text{A}$	-	65	75	
Body Diode Characteristics						
V_{SD}	Diode Forward Voltage	$I_{\text{SD}}=-1\text{A}, V_{\text{GS}}=0\text{V}$	-	-0.7	-1.0	V
Dynamic Characteristics						
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=-10\text{V},$ Frequency=1.0MHz	-	732	-	pF
C_{oss}	Output Capacitance		-	212	-	
C_{rss}	Reverse transfer capacitance		-	96	-	
$t_{\text{d}(\text{ON})}$	Turn-on delay Time	$V_{\text{GS}}=-4.5\text{V}, V_{\text{DS}}=10\text{V}$ $R_G=3\Omega, I_D=1\text{A}, R_L=2.5\Omega,$	-	21	-	nS
t_r	Turn-on rise Time		-	12	-	
$t_{\text{d}(\text{OFF})}$	Turn-off delay Time		-	21	-	
t_f	Turn-off rise Time		-	27	-	
Gate Charge Characteristics						
Q_g	Total Gate Charge	$V_{\text{DS}}=-10\text{V}, V_{\text{GS}}=-4.5\text{V},$ $I_{\text{DS}}=-4\text{A}$	-	9	-	nC
Q_{gs}	Gate-Source Charge		-	8.3	-	
Q_{gd}	Gate-Drain Charge		-	2.5	-	

TYPICAL CHARACTERISTICS (25°C Unless Note)

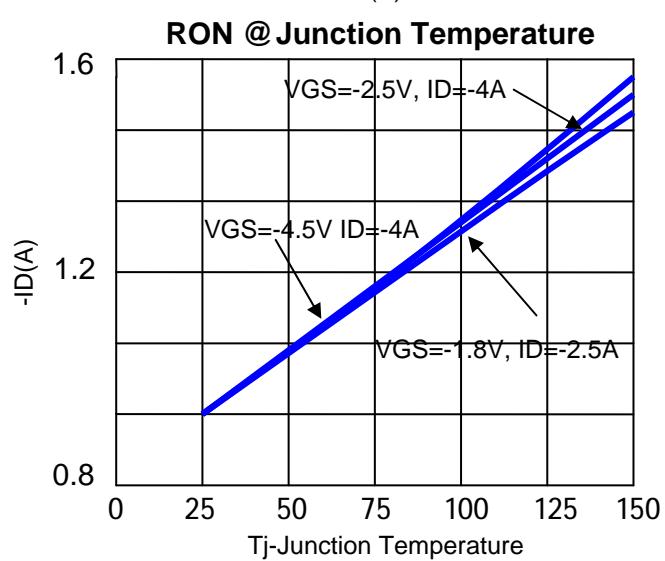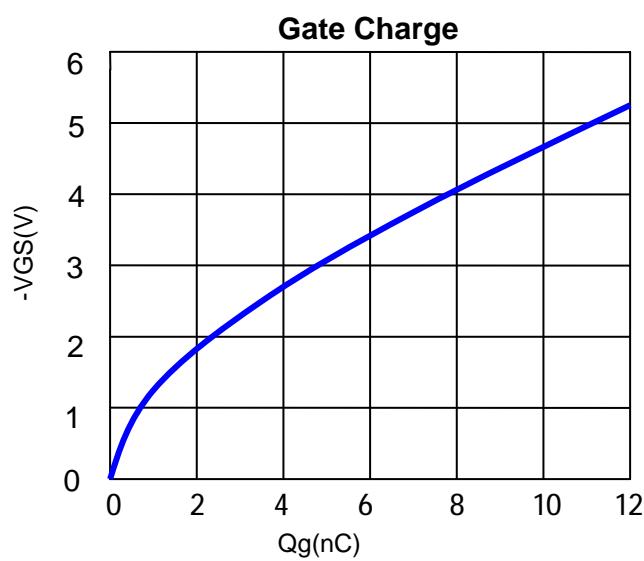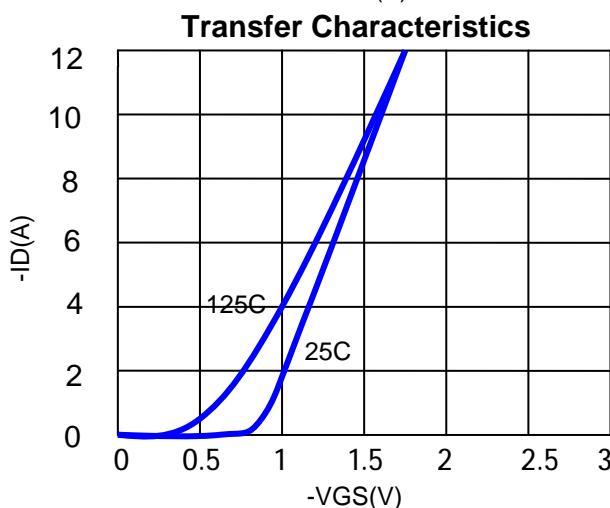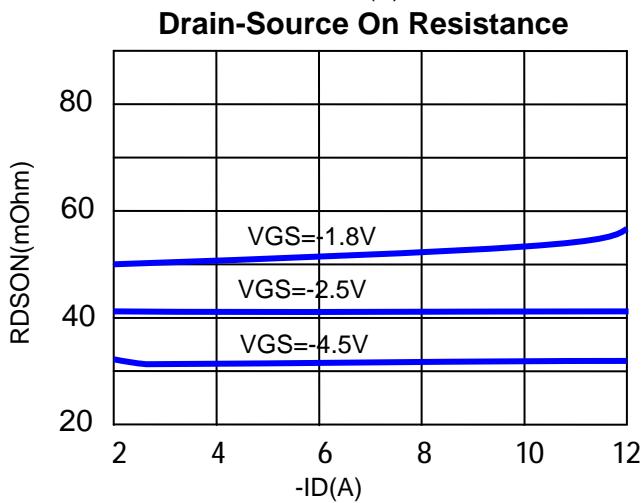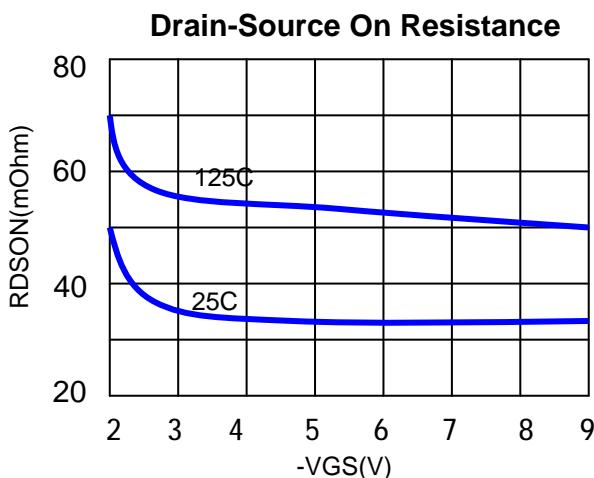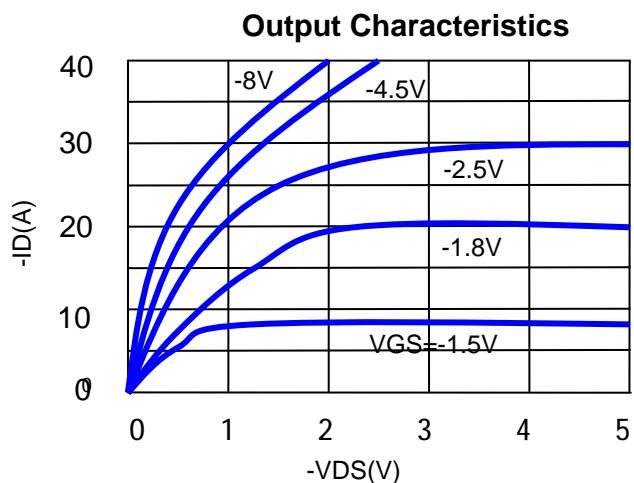


TYPICAL CHARACTERISTICS (continuous)


Source Drain Diode Forward

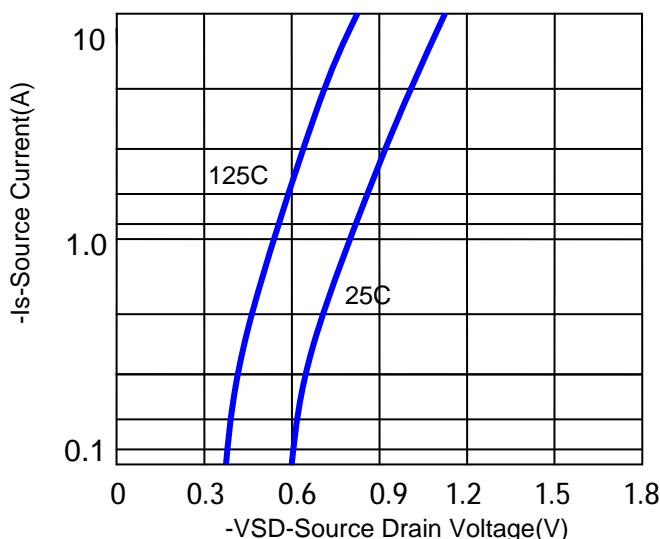


Capacitance

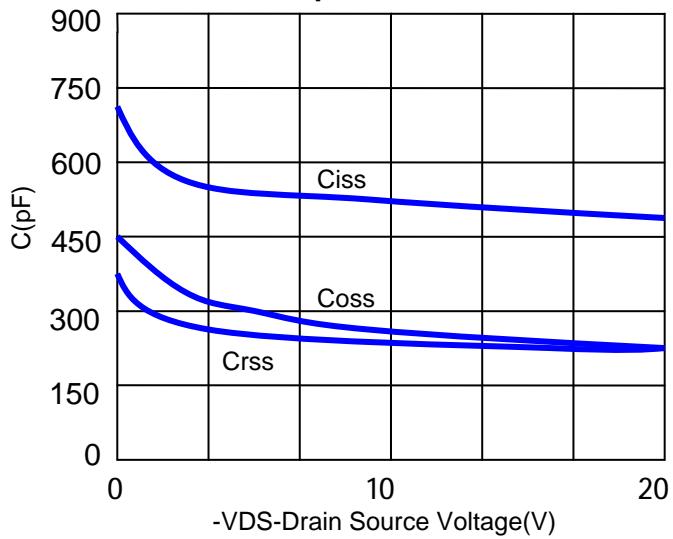


Power Dissipation @ T_j

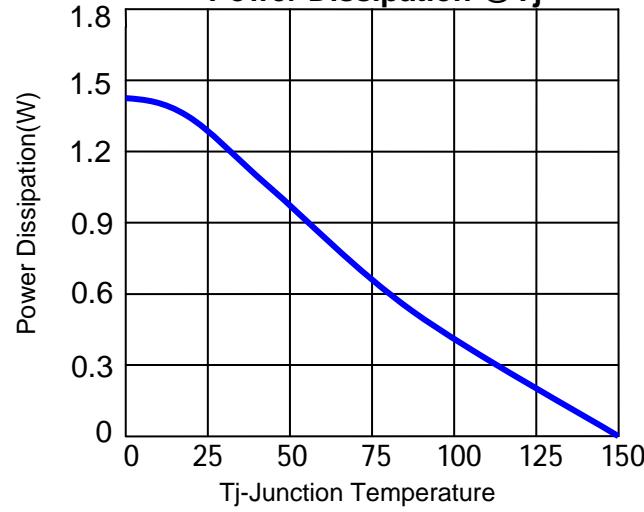


Drain Current @ T_j

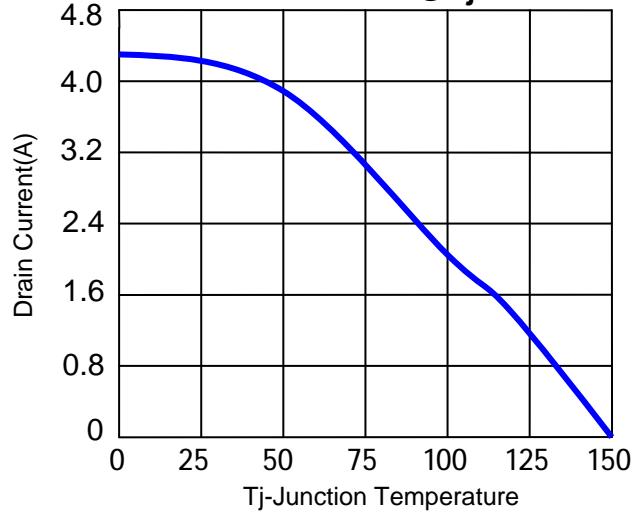


Thermal Transient Impedance

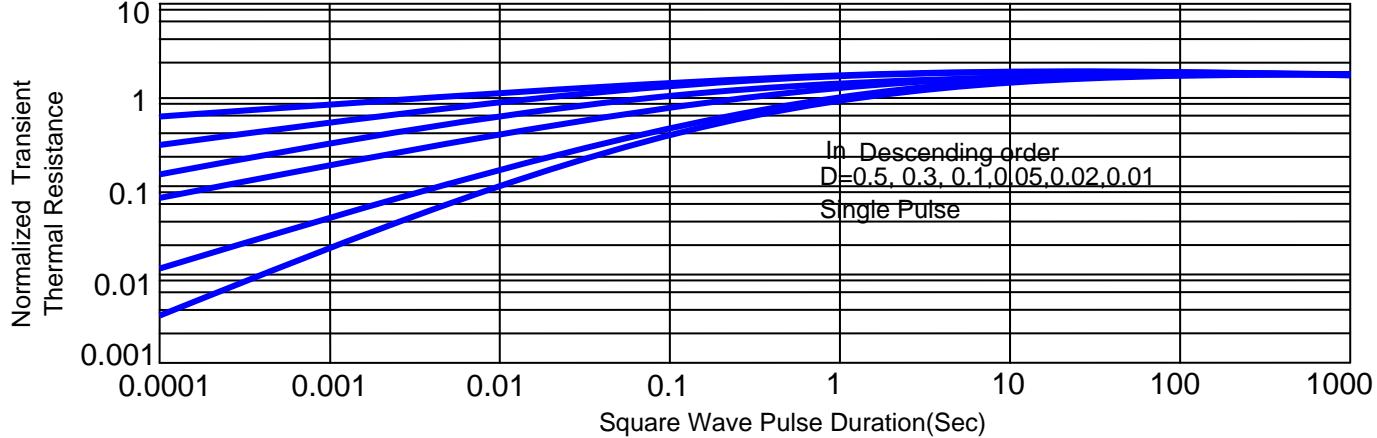


Avalanche Test Circuit and Waveforms

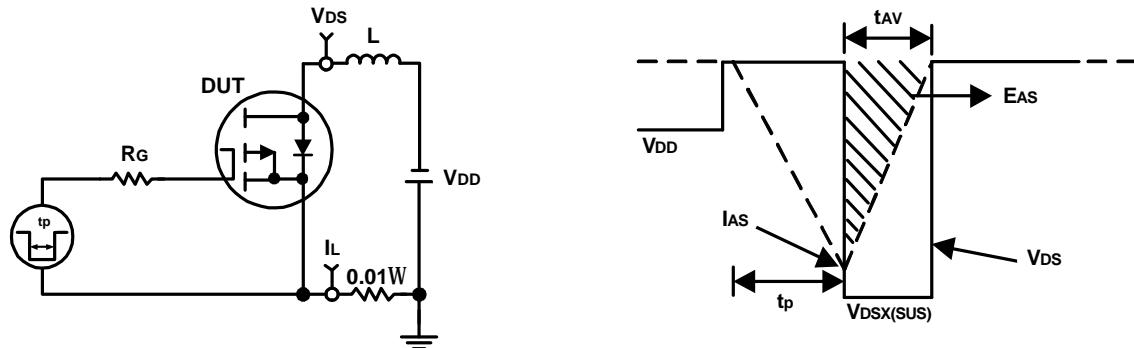

Switching Time Test Circuit and Waveforms

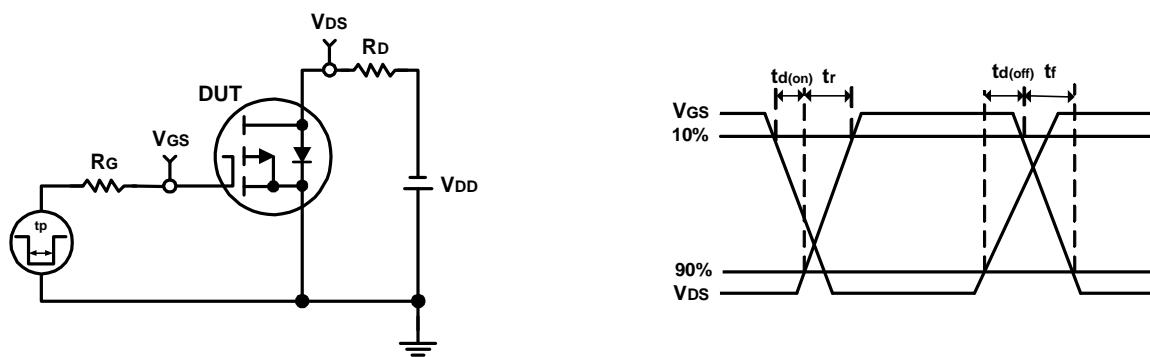


■ SOT23-3L PACKAGE OUTLINE DIMENSIONS

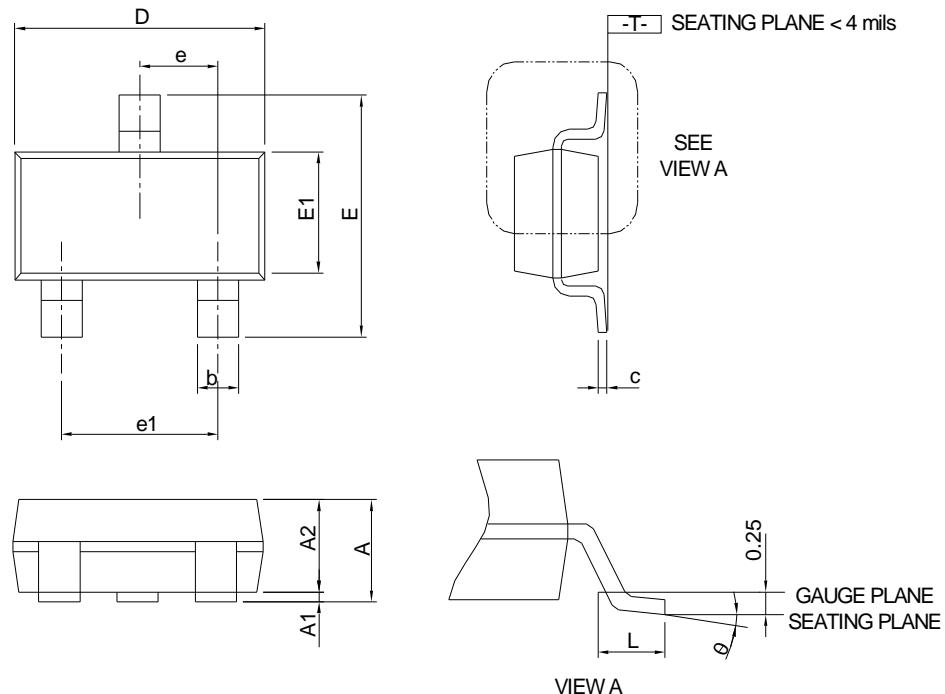

SYMBOL	SOT23-3			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A		1.20		0.047
A1	0.00	0.08	0.000	0.003
A2	0.90	1.12	0.035	0.044
b	0.30	0.50	0.012	0.020
c	0.08	0.22	0.003	0.009
D	2.70	3.10	0.106	0.122
E	2.60	3.00	0.102	0.118
E1	1.40	1.80	0.055	0.071
e	0.95 BSC		0.037 BSC	
e1	1.90 BSC		0.075 BSC	
L	0.30	0.60	0.012	0.024
θ	0°	8°	0°	8°

RECOMMENDED LAND PATTERN

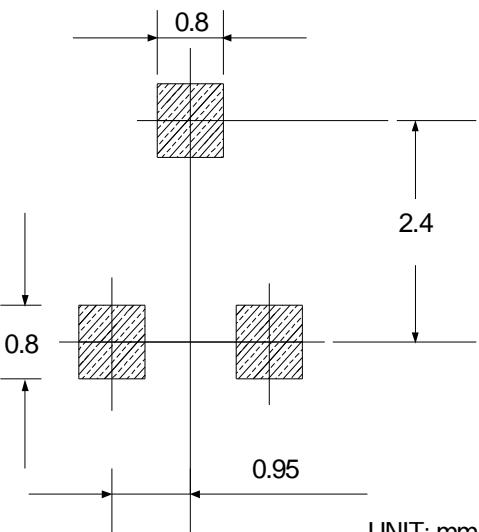

UNIT: mm

Note : Dimension D and E1 do not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 10 mil per side.

Attention

- Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress rating only and functional device operation is not implied. YiDeng Wei Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all YiDeng Wei Semiconductor products described or contained herein.
- Any and all YiDeng Wei Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your representative nearest you before using our products described or contained herein in such applications.
- YiDeng Wei Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- YiDeng Wei Semiconductor reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. YiDeng Wei Semiconductor does not assume any liability arising out of the application or use of any product described herein.